

i15 VET

Veterinary Blood Gas and Chemistry Analysis System

Parameter	Reportable Range	Resolution	Measurement method
pH (pH units)	6.5 – 8.0	0.001	Potentiometric sensor
pO_2 (mmHg)	10 – 700	0.1	Amperometric sensor
pCO_2 (mmHg)	10 – 150	0.1	Potentiometric sensor
Na (mmol/L)	100 – 180	0.1	Potentiometric sensor
K (mmol/L)	2.0 – 9.0	0.01	Potentiometric sensor
Ca (mmol/L)	0.25 – 2.5	0.01	Potentiometric sensor
Cl (mmol/L)	65 – 140	0.1	Potentiometric sensor
Glu (mg/dL or mmol/L)	20 – 700\1.1 – 38.9	1/0.1	Amperometric sensor
Lac (mg/dL or mmol/L)	2.7 – 180.2\0.3 -20	0.1/0.01	Amperometric sensor
Hct (%PCV or Fraction)	10 – 75\0.10 – 0.75	1%/0.01	Conductance sensor

Specification

Throughput	Results in 1 minute after sample aspiration
Sample volume	140µl / 80µl
Quality control	3 or 5 levels QC, External electronic simulator
Display	7-inch color LCD Display, 800*480
Interface	4 x USB 2.0 host, 1 x RS232, WLAN
Input device	Touch screen and barcode scanner
Power supply	100~240VAC, 50/60Hz
Battery	4200mAh rechargeable lithium-ion battery, 50 samples continuous testing
Dimensions (W*H*D)	238*153*310 mm
Weight	3.65 KG
Operation Environment	10 ℃-31 ℃; %RH: 25%-80%; 70 -106.6 KPa

About Edan

Edan is a healthcare company dedicated to improving the human condition around the world by delivering value-driven, innovative and high-quality medical products and services. For over 20 years, Edan has been pioneering a comprehensive line of medical solutions that address a broad range of healthcare practices including:

- Diagnostic ECG
- Patient Monitoring
- OB/GYN
- Ultrasound Imaging
- Point-of-Care Testing
- *In-Vitro* Diagnostics
- Veterinary

Healthcare professionals around the world depend on Edan's breakthrough medical technologies and outstanding customer support.

EDAN
A world of potential

Global Headquarters:
Edan Instruments, Inc. | 15 Jinhui Road, Pingshan District, Shenzhen
518122 P.R. China | +86.755.26898326 | www.edan.com | info@edan.com
U.S. and Canada inquiries:
EDAN Diagnostics, Inc. | 9918 Via Pasar, San Diego, CA 92126
+1.858.750.3066 | www.edandiagnostics.com | edan-info@edandiagnostics.com

© Edan Instruments, Inc. All rights reserved. Features and specifications are subject to change without prior notice.
No reproduction, copy or transmission may be made without written permission.
Not all products or features are available in all countries, contact Edan for local availability.

CE

ENG-POCT-i15VET-V2.6-20221208

i15 VET

Veterinary Blood Gas and Chemistry Analyzer



EDAN
A world of potential

LAN/Wi-Fi connectivity



Build-in Printer and USB Storage





i15 trailer

Portable, lightweight

- Capable to run 50 samples with fully-charged battery
- Diagnose at the point of care, patient side, out in the field or exam room

Easy, Quick and Convenient

- Zero maintenance
- Minimize hands on time and training requirement
- Auto-sampling
- Report is ready within one minute after sample aspiration

Accurate and Reliable

- Innovative microchip liquid control technology and micro-sensor multifunction membrane technology
- High sensitivity and accuracy
- Calibrator, Control and Electronic simulator to TRIPLE guarantee the RESULTS!

Flexible Data Management

- Acquire patients' information via barcode/QR code
- Up to 10,000 patient data storage
- 4 USB ports and LAN/WiFi for data management
- Optional data management software

Multi-parameter cartridge


- Multi popular time-sensitive parameters come in one cartridge, including ABG, electrolytes and metabolites
- Single-use cartridge avoids contamination
- Room temperature storage with long shelf-life



Portable and lightweight

Touch screen with built-in multimedia tutorials

Steps to operate:

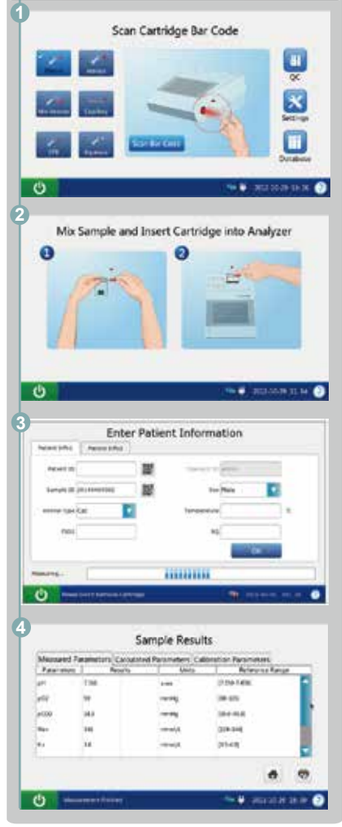

i15 VET

Veterinary Blood Gas and Chemistry Analyzer

i15 VET Quality Control System
Triple Guarantee the Result



Variety of test Cartridges

	pH	pCO_2	pO_2	Na	K	Cl	Ca	Hct	Glu	Lac
Microsample BG3/BG3	—	—	—							
Microsample BG8/BG8	—	—	—	—	—	—	—	—		
Microsample BG4/BG4	—	—	—							—
Microsample BG9/BG9	—	—	—	—	—	—	—	—	—	
Microsample BG10/BG10	—	—	—	—	—	—	—	—	—	—
Microsample BC4/BC4				—	—	—	—	—		

Calculated values: cH^+, HCO^{3-act}, HCO^{3-std}, BE(ecf), BE(B), BB(B), $ctCO_2$, sO_2(est), Ca^{++}(7.4), AnGap, tHb(est), pO_2(A-a), pO_2(a/A), RI, pO_2/FIO_2, cH^+(T), pH(T), pCO_2(T), pO_2(T), pO_2(A-a)(T), pO_2(a/A)(T), RI(T), pO_2(T)/FIO_2, mOsm